



## Reverse Engineering / Aerospace

### Upgrade of a BLACK HAWK Helicopter

Measuring Systems: ATOS, TRITOP

Keywords: External airframe, Reverse Engineering, CAD data

#### Background

BAE Systems Australia was asked to upgrade the electronic technology for the Australian Army's fleet of Black Hawk helicopters. As part of this project BAE Systems Australia needed to establish 3D CAD information which accurately reflects the current state of build of the airframe and ancillary equipment.

It was decided that the quickest and most efficient method was to digitize an actual aircraft so that real 3D data is captured as a factual basis for design and installation upgrade.

BAE Systems Australia contracted MOSS / Scan-Xpress to undertake 3D Photogrammetry and 3D Scanning of the aircraft. Both external and internal data was required.



Fig. 1: Black Hawk Helicopter from the Australian Army, Fuselage Size: 15.4 x 2.4 x 2.3 meters (Length, width and height)

#### BLACK HAWK – Objectives & Overview

The objectives for the 3D Scanning project were to:

1. Measure the external airframe and produce 3D scan data to within a verifiable accuracy of 0.1 mm
2. Measure certain internal areas of interest to the same accuracy
3. Produce an integrated set of data with both the external and internal data in the same co-ordinate frame work
4. Complete the work on site and within the required project time frame
5. Model the aircraft using the scan data and produce an integrated 3D model for CAD analysis



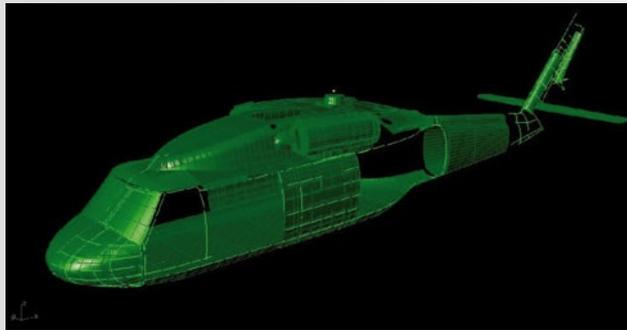


Fig. 2: CAD model developed from scan data (WIP)

### Scanning Methodology Preparation

The aircraft structure was prepared with all doors and hatches in place. MOSS / Scan-Xpress then placed coded and un-coded targets onto the airframe.

Reference data were established and accurately measured to support the accurate integration of multiple measurements from outside and inside the helicopter.

In total, 41 scan data files were created covering both external and internal areas of the aircraft. These contained 12 million data points while maintaining an accuracy of 0.1 mm overall.



Fig. 3: Fuselage prepared for scanning

## Stage 1 - TRITOP

An accuracy test with the reference targets was set up to compare the TRITOP results with Laser tracker data to make sure the data meet the accuracy expectation and the TRITOP system fit into the existing measuring equipment standard of the Australian Army. This measurement was also used to pre-adjust the coordinate system of the big coded reference markers into the helicopter coordinate system.

Then a photogrammetric survey was carried out with the TRITOP system. The result of this first stage is shown in the screen dump below.

The accuracy of this first stage was in addition checked by confirming several physical measurements using established measuring equipment.



Fig. 4: External skin panels - Scan data established by TRITOP (photogrammetry) (9,000 points, accuracy of 0.1 mm, object size > 15 m)

## Stage 2 - ATOS

After the TRITOP stage had been completed, the ATOS 3D scanning stage was started. A typical area which had to be scanned, the nose section, is shown in Figure 5.



Fig. 5: Nose - prepared for scanning with ATOS



Fig. 6: Nose - ATOS Scan data (optical white light scanner data)

# SCAN-XPRESS

EXCELLENCE IN 3D MEASUREMENT

## Stage 3 - Modeling

Following the data capture stages, the scan data was processed by the ATOS system into a nice polygon mesh data set in the STL format. The polygon model was then registered to the aircraft data position.

The total project consisted of 24 million polygons and was subdivided into a number of distinct areas for ease of handling.

Each area was then modeled using a combination of 3D CAD packages. To make sure the CAD data fit the scan data in the needed tolerance, ATOS can read in the CAD data and display the deviation of as built to the Reverse Engineered surface as a color coded cloud of data. The resulting and approved overall CAD model was then used by BAE Systems Australia to plan and design the electronic upgrades.

## Results and Benefits

1. Quick and accurate data capture of a relatively large object
2. Confidence that the data reflects the "as built" state of the aircraft
3. Data that can readily be imported into the desired CAD software for planning and design purposes
4. Savings in time and cost compared to more traditional methods

We would like to thank MOSS / Scan-Xpress Pty Ltd for this case study and BAE Systems Australia for their support of optical scanning technology.

